


Sideshifting fork positioner

ZVP-S
ISO II

constant sideshift, bolt-on forks

The **sideshifting fork positioner ZVP-S** is designed to allow fork spread beyond the width of the carriage. This flexible feature is ideal in situations where space is important. A huge variety of loads can be handled with extreme efficiency. This strong and durable attachment has excellent visibility and minimised lost load centre with the use of innovative double T / E profiles. The attachment is equipped with constant sideshift and bolt-on forks as standard. Clamping of goods is not allowed with this attachment.


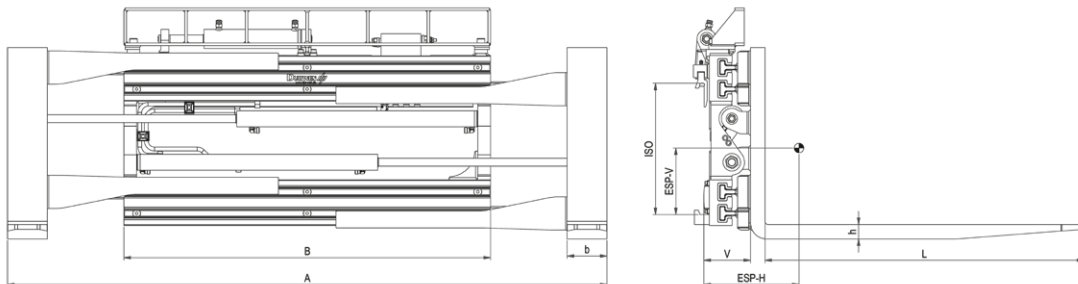


type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	opening range A OTO mm	forks b x h x L mm	sideshift mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg
ZVP 15-S*	1,0-1,5/500	730 730 900	1500/500	II	880 980 1050	560-1610 560-1710 560-1780	100x35x1200	+/- 75 +/- 100 +/- 100	116	192 188 186	195 192 190	287 297 305
ZVP 20-S	1,6-2,0/500	730 900 900	2000/500		980 1050 1150	560-1710 560-1780 560-1880	100x40x1200	+/- 100	121	204 198 196	188 186 184	320 330 340
ZVP 25-S	2,0-2,5/600	730 900 900 900 900 980	2500/600		980 1050 1080 1150 1150 1200 1400	560-1710 560-1780 560-1810 560-1880 320-1400 560-1930 560-2130	125x45x1200	+/- 100	148	228 218 217 212 208 206 195	185 188 189 190 190 190 194	410 420 425 435 430 435 445

- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard
- with protection strip as standard
- load backrest type LS-K see page 247
- flow divider as standard

***Forks longer 1600 mm
cross section changes**

type	forks b x h mm
ZVP 15-S	100x40

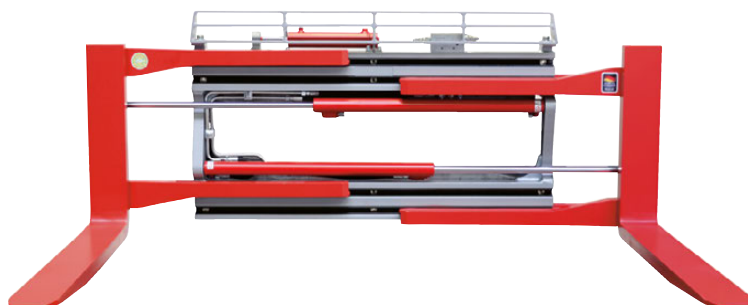

forks bolted from the rear

DURWEN 
Forklift Attachments

PL 01-2026