


Sideshifting fork positioner


ZVP-S
ISO III

constant sideshift, bolt-on forks

The **sideshifting fork positioner ZVP-S** is designed to allow fork spread beyond the width of the carriage. This flexible feature is ideal in situations where space is important. A huge variety of loads can be handled with extreme efficiency. This strong and durable attachment has excellent visibility and minimised lost load centre with the use of innovative double T / E profiles. The attachment is equipped with constant sideshift and bolt-on forks as standard. Clamping of goods is not allowed with this attachment.

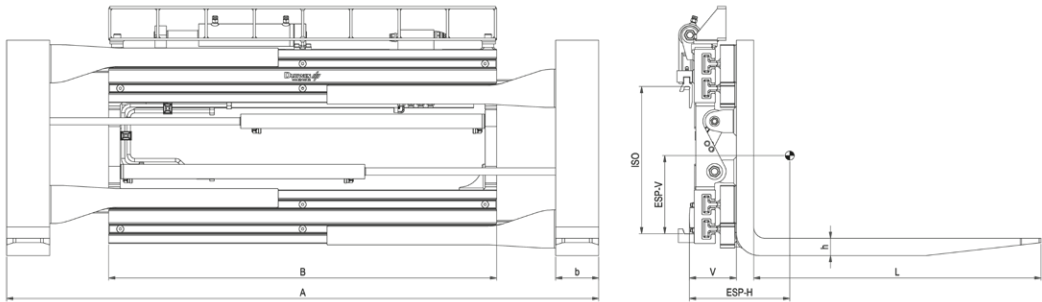

type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	opening range A OT0 mm	forks b x h x L mm	sideshift mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg
ZVP 30-S	3,0/500	730 730 900 900 900 900 900 1050	3000/500	III	980 1000 1050 1150 1150 1200 1300 1350 1450	560-1710 560-1730 560-1780 560-1880 440-1640 560-1930 560-2030 560-2080 560-2180	125x45x1200	+/- 100	148	217 215 213 205 203 202 201 200 198	227 228 230 234 235 235 236 237 239	425 432 435 450 446 465 470 480 495
ZVP 35-S	3,0/600-3,5/500	980 980 980	3500/500		1150 1250 1350	560-1880 560-1980 560-2080	140x50x1200		153	232 230 228	225 226 228	505 520 545
ZVP 40-S	3,5-4,0/600	1050 1050 1050 1150	4000/500		1150 1250 1350 1450	550-1860 550-1960 550-2060 550-2160	140x50x1200		155	210 206 205 204	255 260 262 264	625 640 660 680
ZVP 45-S	4,5-5,0/500	1050 1050 1050 1150 1150	5000/500		1150 1250 1350 1450 1550	550-1860 550-1960 550-2060 550-2160 550-2260	150x60x1200		165	205 205 203 202 201	244 247 250 252 253	680 700 720 740 760
ZVP 48-S	5,0/600	1050 1150 1150	5000/600		1350 1450 1550	550-2060 550-2160 550-2260	150x60x1200		175	195 193 190	253 254 255	790 810 830

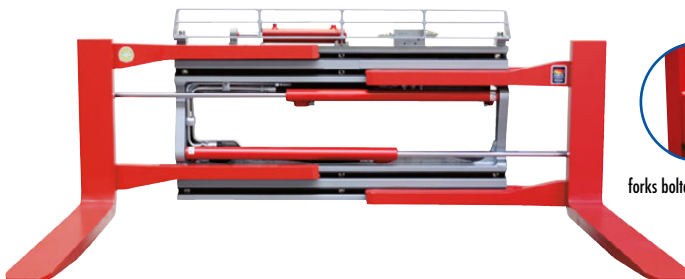

forks bolted from the rear



- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard
- with protection strip as standard
- load backrest type LS-K see page 247
- flow divider as standard