
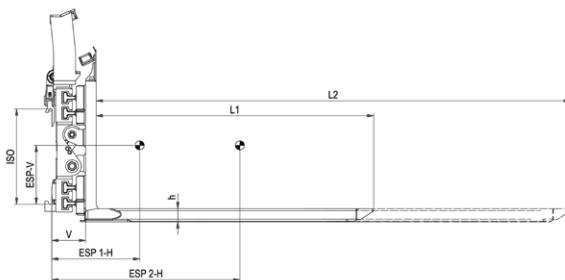


Fork positioner

ZVP-S-TGZ
ISO II

telescopic forks, constant sideshift

The **ZVP-S-TGZ** is a combination of fork positioner and telescopic forks that enables quick and cost effective loading and stacking especially when loading and unloading from one side of a vehicle. The unit copes with a variety of logistical needs including different pallet sizes and load dimensions. The telescopic forks feature 100% synchronised reach movement for ease of use. As this fork positioner spreads the forks beyond the frame width, it is ideal for handling wide goods and pallets. Clamping not allowed. Fork pockets feature +2mm wear resistant mangan steel wear zone as standard.

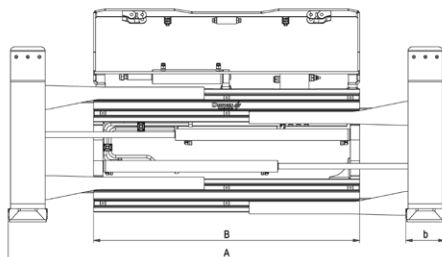

type	lift truck to LC mm	min. carriage mm	capacity kg LC 1 mm	capacity kg LC 2 mm	ISO	B mm	opening range A OTO mm	retracted extended L1/L2 mm	fork bxh mm	fork back mm	sideshift mm	V LLC mm	COG/ESP hor. 1/2 mm	COG/ ESP vert. mm	weight kg
ZVP-S-TGZ.22.1200	1,5-2,0/500	800 900	2000/500	950/1450	II	1050 1150	560-1780 560-1880	1200/2050	161x57	150x45	+/- 100	121	290/385 285/380	200 198	470 485
ZVP-S-TGZ.22.1350	1,5-2,0/500	800 900	2000/500	810/1750		1050 1150	560-1780 560-1880	1350/2350	161x57	150x45		121	340/450 335/445	194 192	487 500
ZVP-S-TGZ.25.1200	2,5/600	800 900	2500/600	1200/1450		1050 1150	560-1780 560-1880	1200/2050	161x 7	150x45		148	285/380 280/375	190 185	485 503
ZVP-S-TGZ.25.1350	2,5/600	800 900	2500/600	1000/1750		1050 1150	560-1780 560-1880	1350/2350	161x57	150x45		148	335/445 330/440	158 156	502 520

- 3 hydraulic functions required
- includes hoses and couplings
- bolt-on TGZ as standard
- protection strip with integrated hose guide as standard
- standard with easily replaceable wear zones and fork tip made of solid steel to reduce service costs
- thicker mangan steel wear zone (+6 mm) ISO II upon request

- pallet stop ISO II upon request (see page 202):
 - A) 75 mm on the fork pocket sides
 - B) 400 mm
 - C) 850 mm
- type B and C reduce the useable length by 50 mm
- different pallet stop positions upon request
- solenoid valve upon request (12 V, 24 V, 48 V, 80 V - please specify)
- ISO type B mounting ISO II

