


Fork positioner

telescopic forks, constant sideshift

The **ZVP-S-TGZ** is a combination of fork positioner and telescopic forks that enables quick and cost effective loading and stacking especially when loading and unloading from one side of a vehicle. The unit copes with a variety of logistical needs including different pallet sizes and load dimensions. The telescopic forks feature 100% synchronised reach movement for ease of use. As this fork positioner spreads the forks beyond the frame width, it is ideal for handling wide goods and pallets. Clamping not allowed. Fork pockets feature +2mm wear resistant mangan steel wear zone as standard.

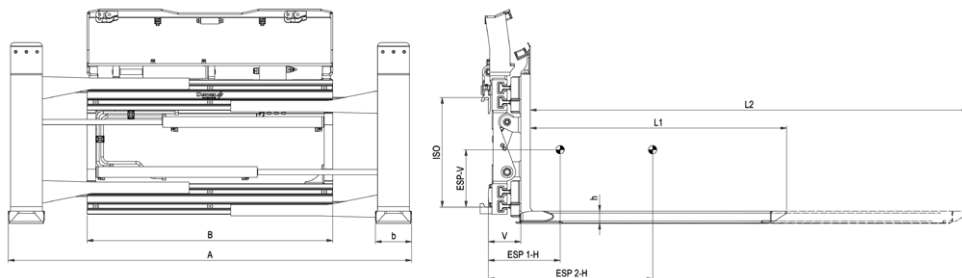

type	lift truck to LC mm	min. carriage mm	capacity kg LC 1 mm	capacity kg LC 2 mm	ISO	B mm	opening range A OTO mm	retracted extended L1/L2 mm	fork bxh mm	fork back mm	sideshift mm	V LLC mm	COG/ESP hor. 1/2 mm	COG/ESP vert. mm	weight kg	
ZVP-S-TGZ.35.1200	3,0-3,5/500	920 980	3500/500	1630/1450	III	1050 1150	560-1780 560-1880	1200/2050	161x57	150x45	+/- 100	153	290/375 285/370	226 193	505 529	
ZVP-S-TGZ.35.1350	3,0-3,5/500	920 980	3500/500	1390/1750		1050 1150	560-1780 560-1880	1350/2350	161x57	150x45		153	330/440 325/435	219 217	522 546	
ZVP-S-TGZ.40.1200	4,0/500	1050 1050	4000/500	1850/1450		1150 1350	550-1860 550-2060	1200/2050	161x57	150x45		155	250/320 240/310	262 260	621 661	
ZVP-S-TGZ.40.1350	4,0/500	900 1050	4000/500	1550/1750		1150 1350	550-1860 550-2060	1350/2350	161x57	150x45		155	285/370 275/360	258 255	638 678	
ZVP-S-TGZ.45.1200	5,0/500	1050 1050	5000/500	2300/1450		1350	550-2060	1200/2050	161x62	150x50		165	230/285	259	710	
ZVP-S-TGZ.45.1350				1900/1750				1350/2350					255/320	251	729	
ZVP-S-TGZ.48.1200	5,0/600	1050 1050	5000/600	2350/1450		1350	550-2060	1200/2050	161x62	150x50		175	225/280	258	742	
ZVP-S-TGZ.48.1350				1950/1750				1350/2350					250/315	253	761	

- 3 hydraulic functions required
- includes hoses and couplings
- bolt-on TGZ as standard
- protection strip with integrated hose guide as standard
- standard with easily replaceable wear zones and fork tip made of solid steel to reduce service costs
- thicker mangan steel wear zone (+6 mm) ISO III upon request

- pallet stop ISO III upon request (see page 202):
A) 75 mm on the fork pocket side
B) 400 mm
C) 850 mm
type B and C reduce the useable length by 50 mm
- different pallet stop positions upon request
- solenoid valve upon request (12 V, 24 V, 48 V, 80 V - please specify)
- ISO type B mounting ISO III upon request

