


Fork positioner

ZVP-S-TGZ
ISO IV

telescopic forks, constant sideshift

The **ZVP-S-TGZ** is a combination of fork positioner and telescopic forks that enables quick and cost effective loading and stacking especially when loading and unloading from one side of a vehicle. The unit copes with a variety of logistical needs including different pallet sizes and load dimensions. The telescopic forks feature 100% synchronised reach movement for ease of use. As this fork positioner spreads the forks beyond the frame width, it is ideal for handling wide goods and pallets. Clamping not allowed. Fork pockets feature +2mm wear resistant mangan steel wear zone as standard.

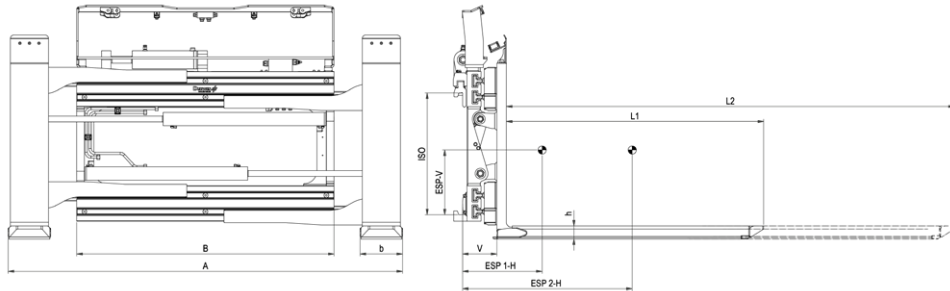

type	lift truck to LC mm	min. carriage mm	capacity kg LC 1 mm	capacity kg LC 2 mm	ISO	B mm	opening range A OTO mm	retracted extended L1/L2 mm	fork b x h mm	fork back mm	sideshift mm	V LLC mm	COG/ESP hor. 1/2 mm	COG/ ESP vert. mm	weight kg
ZVP-S-TGZ.50.1200 ZVP-S-TGZ.50.1350	5,0/600	1090 1090	5000/600	2350/1450 1950/1750	IV	1350	550-2060	1200/2050 1350/2350	161x62	150x50	+/- 100	179	220/275 245/310	292 286	865 884
ZVP-S-TGZ.60.1200 ZVP-S-TGZ.60.1350	6,0/600	1150 1150	6000/600	3100/1450 2570/1750		1550	550-2260	1200/2050 1350/2350	215x69	200x50	+/- 160		230/295 290/365	290 284	1014 1029

- 3 hydraulic functions required
- includes hoses and couplings
- bolt-on TGZ as standard
- protection strip with integrated hose guide as standard
- standard with easily replaceable wear zones and fork tip made of solid steel to reduce service costs
- thicker mangan steel wear zone (+6 mm) ISO IV upon request
- pallet stop ISO IV upon request (see page 202):
 - A) 75 mm on the fork pocket sides
 - B) 400 mm
 - C) 850 mm
- type B and C reduce the useable length by 50 mm
- different pallet stop positions upon request
- solenoid valve upon request (12 V, 24 V, 48 V, 80 V - please specify)
- ISO type B mounting ISO IV upon request

