


Fork positioner

ZVP-TGZ
ISO II/III

telescopic forks, no sideshift

The **ZVP-TGZ** is a combination of fork positioner and telescopic forks that enables quick and cost effective loading and stacking especially when loading and unloading from one side of a vehicle. The unit copes with a variety of logistical needs including different pallet sizes and load dimensions. The telescopic forks feature 100% synchronised reach movement for ease of use. As this fork positioner spreads the forks beyond the frame width, it is ideal for handling wide goods and pallets. Clamping not allowed. Fork pockets feature +2mm wear resistant mangan steel wear zone as standard.

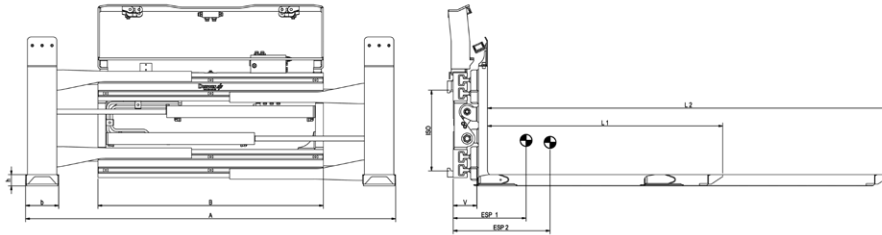

type	lift truck to/ LC mm	min. carriage mm	capacity kg/ LC 1 mm	capacity kg/ LC 2 mm	ISO	B mm	A mm	retracted extended L1/L2 mm	fork b x h mm	fork back mm	V LLC mm	COG/ESP hor. 1/2 mm	COG/ESP vert. mm	weight kg
ZVP-TGZ.25.1200	2,5/600	890 990	2500/600	1200/1450	II	1050 1150	560-1780 560-1880	1200/2050	161x57	150x45	131 131	273/371 264/358	177 180	473 494
ZVP-TGZ.25.1350	2,5/600	890 990	2500/600	1000/1750	II	1050 1150	560-1780 560-1880	1350/2350	161x57	150x45	131 131	315/437 304/422	169 172	490 511
ZVP-TGZ.35.1200	3,5/500	990 990	3500/500	1630/1450	III	1050 1150	560-1780 560-1880	1200/2050	161x57	150x45	136 136	265/357 257/345	220 224	501 522
ZVP-TGZ.35.1350	3,5/500	990 990	3500/500	1390/1750	III	1050 1150	560-1780 560-1880	1350/2350	161x57	150x45	136 136	305/403 295/539	211 215	507 531
ZVP-TGZ.40.1200	4,0/500	990 1150	4000/500	1850/1450	III	1150 1350	560-1860 560-2060	1200/2050	161x57	150x45	138 138	233/311 224/297	245 250	596 626
ZVP-TGZ.40.1350	4,0/500	990 1150	4000/500	1550/1750	III	1150 1350	560-1860 560-2060	1350/2350	161x57	150x45	138 138	325/480 313/461	209 215	608 648
ZVP-TGZ.45.1200	5,0/500	1150	5000/500	2300/1450	III	1350	550-2060	1200/2050	161x62	150x50	148	234/304	248	688
ZVP-TGZ.45.1350	5,0/500	1150	5000/500	1900/1750	III	1350	550-2060	1350/2350	161x62	150x50	148	322/462	215	698
ZVP-TGZ.48.1200	5,0/600	1150	5000/600	2350/1450	III	1350	550-2060	1200/2050	161x62	150x50	158	231/296	255	712
ZVP-TGZ.48.1350	5,0/600	1150	5000/600	1950/1750	III	1350	550-2060	1350/2350	161x62	150x50	158	315/449	224	731

- 2 hydraulic functions required (3 hydraulic functions integral sideshift)
- includes hoses and couplings
- bolt-on TGZ forks as standard
- protection strip with integrated hose guide as standard

- integral sideshift upon request
- standard with easily replaceable wear zones and fork tip made of solid steel to reduce service costs
- thicker mangan steel wear zone (+6 mm) ISO II/III upon request
- pallet stop ISO II/III upon request (see page 202):
 - A) 75 mm on the fork pocket sides
 - B) 400 mm
 - C) 850 mm
 type B and C reduce the useable length by 50 mm
- different pallet stop positions upon request
- solenoid valve upon request (12 V, 24 V, 48 V, 80 V - please specify)
- for ISO type B mounting ISO II/III upon request

