


# Wide opening fork positioner for reach trucks

**ZVP**

no sideshift, bolt-on forks


**The fork positioner ZVP** can spread the forks beyond the frame width. It is ideal for long goods or very wide pallets. This model range features a small frame that supports the configuration of reach trucks. Clamping of goods is not allowed.

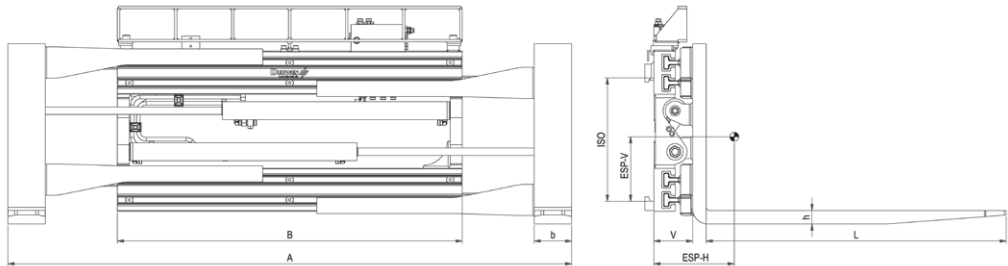

| type    | lift truck<br>to<br>LC mm | min.<br>carriage<br>top/bottom<br>mm                | capacity<br>kg<br>LC mm | ISO | B<br>mm                         | opening<br>range<br>A<br>OTO<br>mm                       | forks<br>b x h x L<br>mm | V<br>LLC<br>mm | COG/<br>ESP<br>hor.<br>mm       | COG/<br>ESP<br>vert.<br>mm      | weight<br>kg                    |
|---------|---------------------------|-----------------------------------------------------|-------------------------|-----|---------------------------------|----------------------------------------------------------|--------------------------|----------------|---------------------------------|---------------------------------|---------------------------------|
| ZVP 15* | 1,0-1,5/500               | 640/640<br>680/600<br>700/680<br>780/730            | 1500/500                | II  | 720<br>750<br>800<br>880        | 560-1450<br>560-1480<br>560-1530<br>560-1610             | 100x35x1200              | 101            | 200<br>195<br>189<br>185        | 185<br>178<br>173<br>170        | 255<br>270<br>282<br>290        |
| ZVP 20  | 1,6-2,0/500               | 640/640<br>680/600<br>700/680<br>780/730            | 2000/500                |     | 720<br>750<br>800<br>880        | 560-1450<br>560-1480<br>560-1530<br>560-1610             | 100x40x1200              | 106            | 210<br>205<br>198<br>195        | 182<br>175<br>170<br>167        | 270<br>285<br>297<br>305        |
| ZVP 25  | 2,0-2,5/600               | 640/640<br>680/600<br>700/680<br>780/730<br>780/730 | 2500/600                |     | 720<br>750<br>800<br>880<br>880 | 560-1450<br>560-1480<br>560-1530<br>560-1610<br>380-1250 | 125x45x1200              | 131            | 252<br>249<br>246<br>242<br>240 | 175<br>170<br>164<br>160<br>158 | 355<br>358<br>363<br>375<br>357 |

- 1 hydraulic function required  
(2 hydraulic functions with integral sideshift)
- includes hoses and couplings
- protection strip as standard
- integral sideshift upon request
- no clamping allowed
- LLC spacer kit upon request (can increase LLC in steps up to 50 mm)
- solenoid valve upon request (12 V, 24 V, 48 V, 80 V - please specify)
- maximum fork length type ZVP-H 1200 mm, other length upon request
- longer fork drop for ZVP 15, 20 and 25 upon request
- load backrest type LS-K see page 247

| *Forks longer 1600 mm<br>cross section changes |                      |
|------------------------------------------------|----------------------|
| type                                           | forks<br>b x h<br>mm |
| ZVP 15                                         | 100x40               |

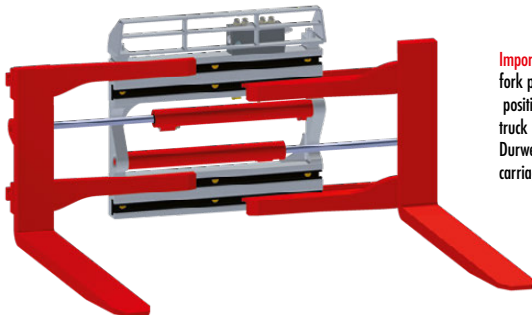

**Important note:** The reach truck must be equipped with a collision prevention that prevents collision of fork positioner parts with the wheel legs or parts of the reach truck. This means usually that for positioning and sideshift must be shut off with the attachment between the wheel legs. The reach truck carriage design must accommodate the mounting of an attachment. A spacer kit is available from Durwen. It allows the extension of the attachment mounting up to 50 mm giving extra space for carriage parts or reach truck parts that may protrude into the attachment mounting or operation space.