
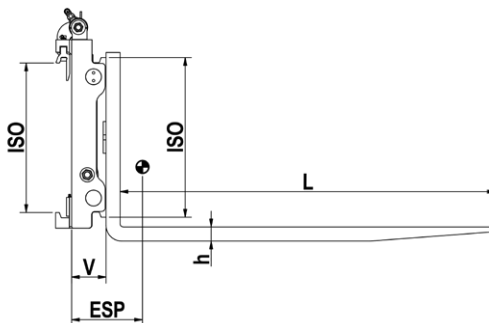


Fork positioner

ZVW-GS
ISO II

constant sideshift, bolt-on forks


The high-performance fork positioner ZVW-GS offers outstanding durability and excellent visibility. The double chrome axis guideways are particularly clean and enables precise fork positioning due to high-quality hydraulics. The bolt-on forks are firmly attached to the carriers and provide smooth running and precision even in quick operation. The constant sideshift operates at every fork position. This means that a separate cylinder moves the complete frame.

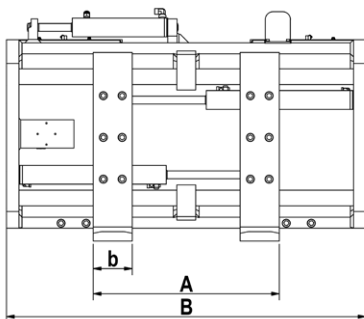

type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	A mm OTO	forks b x h x L mm	sideshift mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg
ZVW 16-GS*	1,0-1,6/500	700 810 820	1600/500	II	850 980 1040	300-730 300-860 300-920	100x40x1200	+/- 75 +/- 100 +/- 100	124	222 216 212	159 162 165	273 283 285
ZVW 20-GS*	1,8-2,0/500	700 810 820 930	2000/500		850 980 1040 1150	300-730 300-860 300-920 300-1030	100x45x1200	+/- 75 +/- 100 +/- 100 +/- 100		234 232 227 221	154 157 160 163	285 290 298 309
ZVW 25-GS*	2,0/600-2,5/500	810 820 930 980 1130	2500/500		980 1040 1150 1200 1350	320-880 320-940 320-1050 320-1100 320-1250	120x40x1200	+/- 100		243 238 231 228 219	152 155 158 159 163	305 308 319 325 341
ZVW 28-GS*	2,5/600	820 930 980 1130	2500/600		1040 1150 1200 1350	325-945 325-1055 325-1105 325-1255	125x45x1200	+/- 100		256 249 245 236	147 151 153 156	328 339 345 361

- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard
- features bolt-on forks as standard

- also for hook-on forks ISO 2328
- load backrest/protection strip type LS-RP see page 248
- clamping of goods is not allowed

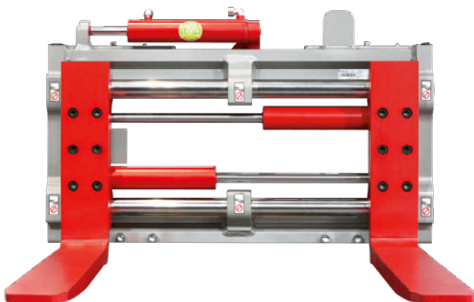

option: protection strip

*Forks longer 1600 mm
cross section changes

type	forks b x h mm
ZVW 16-GS	100x50
ZVW 20-GS	100x50
ZVW 25-GS	120x50
ZVW 28-GS	125x50