


Fork positioner

ZVW-GS
ISO III

constant sideshift, bolt-on forks


The high-performance fork positioner ZVW-GS offers outstanding durability and excellent visibility. The double chrome axis guideways are particularly clean and enables precise fork positioning due to high-quality hydraulics. The bolt-on forks are firmly attached to the carriers and provide smooth running and precision even in quick operation. The constant sideshift operates at every fork position. This means that a separate cylinder moves the complete frame.

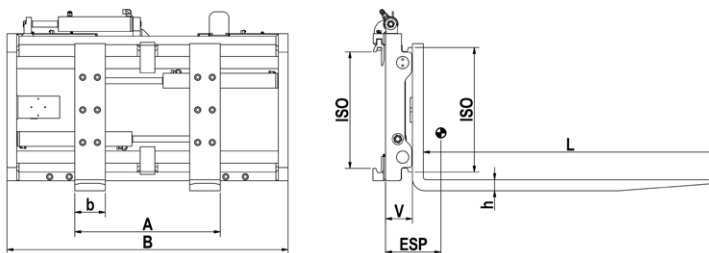

type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	A mm OTO	forks b x h x L mm	sideshift mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg
ZVW 30-GS*	3,0/500	820 930 980 1080 1130	3000/500	III	1040 1150 1200 1300 1350	325-945 325-1055 325-1105 325-1205 325-1255	125x45x1200	+/- 100	127	248 241 238 234 228	192 195 196 200 201	352 363 370 380 388
ZVW 35-GS	3,0/600- 3,5/500	930 980 1080 1130	3500/500		1150 1200 1300 1350	340-1070 340-1120 340-1220 340-1270	140x50x1200		127	265 262 255 252	183 185 188 189	398 405 418 424
ZVW 40-GS	3,5/600- 4,0/500	1020 1030 1080 1130 1200 1280 1480	4000/500		1150 1200 1250 1350 1450 1550 1750	370-1050 370-1100 370-1150 370-1250 370-1350 370-1450 370-1650	140x50x1200		150	249 248 248 247 245 243 239	201 202 204 205 207 209 213	471 479 487 504 520 537 570
ZVW 45-GS	4,0/600- 5,0/600	1020 1080 1130 1180 1280 1480	5000/600		1150 1250 1350 1450 1550 1750	380-1060 380-1160 380-1260 380-1360 380-1460 380-1660	150x60x1200		150	274 268 261 255 249 240	186 189 192 196 198 202	532 550 566 583 600 632

- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard
- features bolt-on forks as standard
- also for hook-on forks ISO 2328

- load backrest/protection strip type LS-RP see page 248
- clamping of goods is not allowed

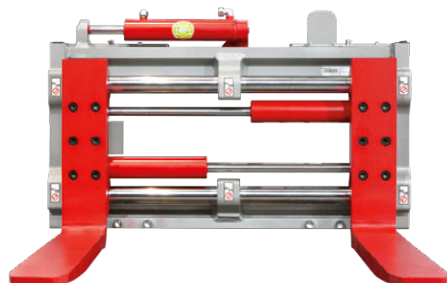

option: protection strip

*Forks longer 1600 mm cross section changes	
type	forks b x h mm
ZVW 30-GS	125x50