
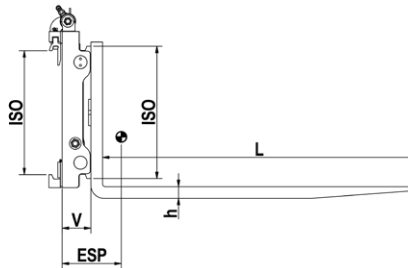


Fork positioner

ZVW-GS
ISO IV

constant sideshift, bolt-on forks

The high-performance fork positioner ZVW-GS offers outstanding durability and excellent visibility. The double chrome axis guideways are particularly clean and enables precise fork positioning due to high-quality hydraulics. The bolt-on forks are firmly attached to the carriers and provide smooth running and precision even in quick operation. The constant sideshift operates at every fork position. This means that a separate cylinder moves the complete frame.




type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	A mm OTO	forks b x h x L mm	sideshift mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg
ZVW 50-GS	5,0/600	1050 1100 1150 1230	5000/600	IV	1250 1350 1450 1550	370-1150 380-1260 380-1360 380-1460	150x70x1200	+/- 100	156	230 227 225 220	261 263 267 269	675 693 711 729
ZVW 55-GS	5,5/600	1050 1100 1150 1230	5500/600		1250 1350 1450 1550	380-1160 380-1260 380-1360 380-1460	150x70x1200	+/- 100	156	231 229 227 222	261 263 267 269	685 703 721 739
ZVW 60-GS	6,0/600	1150 1420 1580	6000/600		1460 1660 1860	380-1340 380-1540 380-1740	150x70x1200	+/- 100 +/- 160 +/- 160	166	215 210 205	274 281 290	845 880 915
ZVW 70-GS	6,5-7,0/600	1210 1420 1580 1680	7000/600		1460 1660 1860 2060	380-1340 380-1540 380-1740 380-1940	150x70x1200	+/- 100 +/- 160 +/- 160 +/- 160	193	215 208 201 195	288 293 295 301	933 1000 1061 1110
ZVW 80-GS	8,0/600	1210 1520 1580 1680 1680 1780 1980	8000/600		1460 1800 1860 2060 2160 2260 2400	480-1340 480-1680 480-1740 480-1940 480-2040 480-2140 480-2280	200x70x1200	+/- 100 +/- 160 +/- 160 +/- 160 +/- 160 +/- 160 +/- 160	193	260 243 240 231 228 225 222	265 267 272 276 277 280 282	1090 1187 1204 1267 1291 1315 1350
ZVW 100-GS	8,0/900	1580 1580 1680 1680 1780 1980	8000/900		1800 1860 2060 2160 2260 2400	480-1680 480-1740 480-1940 480-2040 480-2140 480-2280	200x80x1200	+/- 160	210	245 244 240 238 235 230	270 271 277 278 280 282	1480 1495 1555 1585 1615 1670
ZVW 110-GS	8,0/1100	1680 1780 1980	8000/1100		2060 2260 2400	480-1940 480-2140 480-2280	200x80x1200	+/- 160	233	242 236 232	278 282 284	1635 1700 1750

- 2 hydraulic functions required

- includes hoses and couplings

- constant sideshift as standard
- features bolt-on forks as standard also for hook-on forks ISO 2328
- load backrest/protection strip type LS-RP see page 248
- clamping of goods is not allowed



option: protection strip