
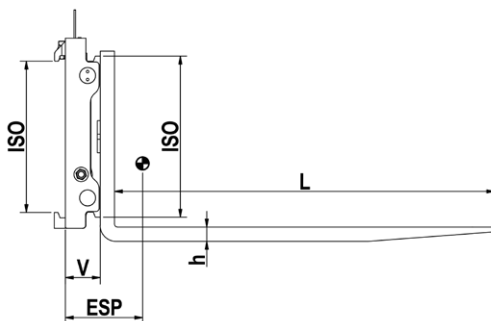


Fork positioner

ZVW-G
ISO II

integral sideshift, bolt-on forks


The **high-performance fork positioner ZVW-G** offers outstanding durability and excellent visibility. The double chrome axis guideways are particularly clean and enables precise fork positioning due to high-quality hydraulics. The bolt-on forks are firmly attached to the carriers and provide smooth running and precision even in quick operation. The integral sideshift operates depending on fork position. This means that only the fork carriers move inside the static frame.

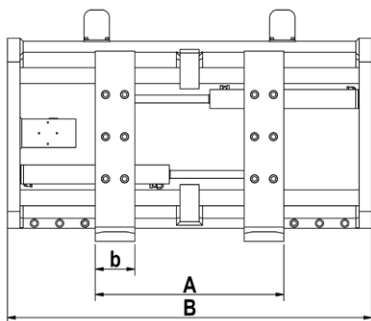

type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	A mm OTO	forks b x h x L mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg	moving mass kg
ZVW 16-G*	1,0-1,6/500	500 660 690	1600/500	II	850 980 1040	300-730 300-860 300-920	100x40x1200	107	239 232 228	134 138 140	227 240 244	141
ZVW 20-G*	1,8-2,0/500	500 660 690 760	2000/500		850 980 1040 1150	300-730 300-860 300-920 300-1030	100x45x1200		255 249 245 240	129 133 135 138	245 252 257 264	143
ZVW 25-G*	2,0/600- 2,5/500	660 690 760 810 960	2500/500		980 1040 1150 1200 1350	320-880 320-940 320-1050 320-1100 320-1250	120x40x1200		261 257 250 247 238	128 130 133 135 139	261 266 275 280 292	151
ZVW 28-G*	2,5/600	690 760 810 960	2500/600		1040 1150 1200 1350	325-945 325-1055 325-1105 325-1255	125x45x1200		275 268 260 238	123 126 128 132	286 295 300 311	171

- 2 hydraulic functions required
- includes hoses and couplings
- includes sideshift via valve, depending on opening range
- features bolt-on forks as standard

- also for hook-on forks ISO 2328
- load backrest/protection strip type LS-RP see page 248
- if you don't want sideshift notify us on your order

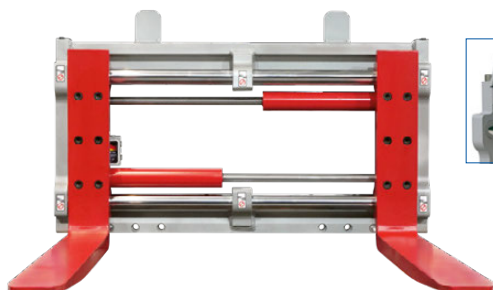

option: protection strip

*Forks longer 1600 mm
cross section changes

type	forks b x h mm
ZVW 16-G	100x50
ZVW 20-G	100x50
ZVW 25-G	120x50
ZVW 28-G	125x50