


Fork positioner

ZVW-G
ISO IV


integral sideshift, bolt-on forks

The high-performance fork positioner **ZVW-G** offers outstanding durability and excellent visibility. The double chrome axis guideways are particularly clean and enables precise fork positioning due to high-quality hydraulics. The bolt-on forks are firmly attached to the carriers and provide smooth running and precision even in quick operation. The integral sideshift operates depending on fork position. This means that only the fork carriers move inside the static frame.

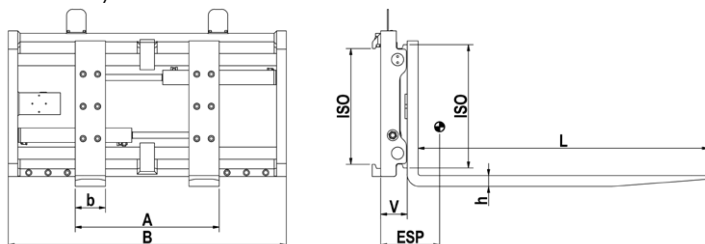

type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	A mm OTO	forks b x h x L mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg	moving mass kg
ZVW 50-G	5,0/600	880 880 930 1030	5000/600	IV	1250 1350 1450 1550	370-1150 380-1260 380-1360 380-1460	150x70x1200	133	232 227 222 217	213 217 220 223	624 641 658 675	346
ZVW 55-G	5,5/600	880 880 930 1030	5500/600		1250 1350 1450 1550	380-1160 380-1260 380-1360 380-1460	150x70x1200	133	234 229 224 219	213 217 220 223	634 651 668 685	346
ZVW 60-G	6,0/600	1015 1080 1240	6000/600		1460 1660 1860	380-1340 380-1540 380-1740	150x70x1200	143	222 214 205	230 236 241	747 785 822	361
ZVW 70-G	6,5-7,0/600	990 1080 1240 1440	7000/600		1460 1660 1860 2060	380-1340 380-1540 380-1740 380-1940	150x70x1200	170	220 210 201 190	241 246 251 256	857 900 948 1000	377
ZVW 80-G	8,0/600	990 1180 1295 1340 1440 1540 1750	8000/600		1460 1800 1860 2060 2160 2260 2400	480-1340 480-1680 480-1740 480-1940 480-2040 480-2140 480-2280	200x70x1200	170	260 224 240 232 228 224 220	220 228 229 234 236 238 240	995 1075 1090 1142 1170 1198 1230	521
ZVW 100-G	8,0/900	1200 1250 1340 1440 1540 1680	8000/900		1800 1860 2060 2160 2260 2400	480-1680 480-1740 480-1940 480-2040 480-2140 480-2280	200x80x1200	195	237 236 230 227 225 220	243 246 250 252 255 258	1375 1395 1465 1500 1535 1590	586
ZVW 110-G	8,0/1100	1550 1700 1750	8000/1100		2060 2260 2400	480-1940 480-2140 480-2280	200x80x1200	210	235 225 220	249 258 262	1540 1615 1670	598

- 2 hydraulic functions required
- includes hoses and couplings
- includes sideshift via valve, depending on opening range



- features bolt-on forks as standard
- also for hook-on forks ISO 2328



option: protection strip

- load backrest/protection strip type LS-RP see page 248
- if you don't want sideshift notify us on your order