


Fork positioner


ZVW-IG
ISO IV

integrated version, integral sideshift, bolt-on forks

The **integrated fork positioner ZVW-IG** offers outstanding durability and excellent visibility. The double chrome axis guideways are particularly clean and enables precise fork positioning due to high-quality hydraulics. The bolt-on forks are firmly attached to the carriers and provide smooth running and precision even in quick operation. The integral sideshift operates depending on fork position. This means that only the fork carriers move inside the static frame.

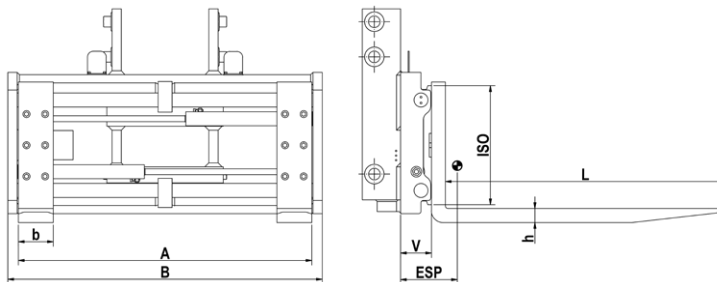

type	lift truck to LC mm	capacity kg LC mm	ISO	B mm	A mm OTO	forks b x h x L mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg	moving mass kg
ZVW 50-IG	5,0/600	5000/600	IV	1250 1350 1450 1550	370-1150 380-1260 380-1360 380-1460	150x70x1200	133	230 225 220 215	213 217 219 220	625 645 665 680	346
ZVW 55-IG	5,5/600	5500/600		1250 1350 1450 1550	380-1160 380-1260 380-1360 380-1460	150x70x1200	133	235 230 225 220	213 217 219 220	635 655 675 690	346
ZVW 60-IG	6,0/600	6000/600		1460 1660 1860	380-1340 380-1540 380-1740	150x70x1200	150	225 215 205	230 236 241	735 775 815	361
ZVW 70-IG	6,5-7,0/600	7000/600		1460 1860 2060	380-1340 380-1740 380-1940	150x70x1200	177	220 205 200	241 251 256	845 945 990	377
ZVW 80-IG	8,0/600	8000/600		1800 1860 2060 2160 2260 2400	480-1680 480-1740 480-1940 480-2040 480-2140 480-2280	200x70x1200	177	250 245 235 233 230 225	228 229 234 236 238 240	1070 1085 1140 1165 1190 1225	521
ZVW 100-IG	8,0/900	8000/900		1800 1860 2060 2160 2260 2400	480-1680 480-1740 480-1940 480-2040 480-2140 480-2280	200x80x1200	195	250 245 235 230 225 220	233 235 250 252 255 258	1320 1340 1410 1445 1480 1530	586
ZVW 110-IG	8,0/1100	8000/1100		2060 2260 2400	480-1940 480-2140 480-2280	200x80x1200	210	230 225 220	249 258 262	1505 1575 1625	598



- 2 hydraulic functions required
- ready to connect, access metric
- features bolt-on forks as standard
- for hook-on forks ISO 2328
- including brackets, chain anchor and stub shafts, without rollers
- detailed information including carriage drawings are required with the order as well as forklift model and mast model details
- weight, COG and LLC do not include brackets

- LLC does not include forks
- load backrest/protection strip type LS-RP see page 248
- clamping of goods is not allowed