


Fork positioner

ZVW-IG ISO IV


integrated version, integral sideshift (via valve), bolt-on forks

The integral fork positioner ZVW-IG uses a robust chromed bar system in a stable frame. The unit is equipped with bolt-on forks. Depending on the capacity, hook-on forks can be used for replacement. Integral sideshift (via valve) is standard and depends on the opening range.

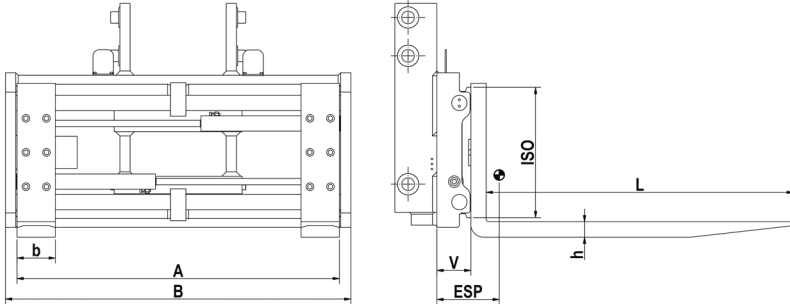

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm OTO	forks b x h x L mm	V LLC mm	ESP COG mm	weight kg
ZVW 50-IG	5000/600	5,0/600	IV	1350	380-1260	150x70x1200	133	225	645
				1450	380-1360			220	665
				1550	380-1460			215	680
ZVW 60-IG	6000/600	6,0/600		1460	380-1340	150x70x1200	150	225	735
				1660	380-1540			215	775
				1860	380-1740			205	815
ZVW 70-IG	7000/600	6,5-7,0/600		1460	380-1340	150x70x1200	177	220	845
				1860	380-1740			205	945
				2060	380-1940			200	990
ZVW 80-IG	8000/600	8,0/600		1800	480-1680	200x70x1200	177	250	1070
				1860	480-1740			245	1085
				2060	480-1940			235	1140
			2160	480-2040	233			1165	
			2260	480-2140	230			1190	
			2400	480-2280	225			1225	
ZVW 100-IG	8000/900	8,0/900	2060	480-1940	200x80x1200	195	235	1410	
			2160	480-2040			230	1445	
			2260	480-2140			225	1480	
			2400	480-2280			220	1530	
ZVW 110-IG	8000/1100	8,0/1100	2060	480-1940	200x80x1200	210	230	1505	
			2260	480-2140			225	1575	
			2400	480-2280			220	1625	

- 2 hydraulic functions required
- ready to connect, access metric
- features bolt-on forks as standard

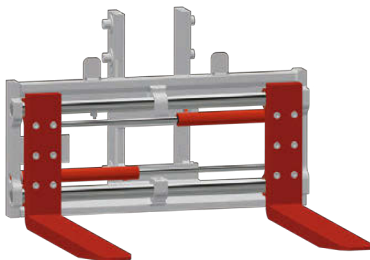

- for hook-on forks ISO 2328
- including brackets, chain anchor and stub shafts, without rollers
- detailed information including carriage drawings are required with the order as well as fork lift model and mast model details
- weight, COG and LLC do not include brackets
- LLC does not include forks
- load backrest/protection strip see page 240
- clamping of goods is not allowed

DURWEN 
Forklift Attachments

More than 75 years experience