


Fork positioner

ZVW
ISO II


integral sideshift, no forks

The **high-performance fork positioner ZVW** offers outstanding durability and excellent visibility. The double chrome axis guideways are particularly clean and enables precise fork positioning due to high-quality hydraulics. Standard forks with ISO mounting or bolt-on forks may be used. The integral sideshift operates depending on fork position. This means that only the fork carriers move inside the static frame.

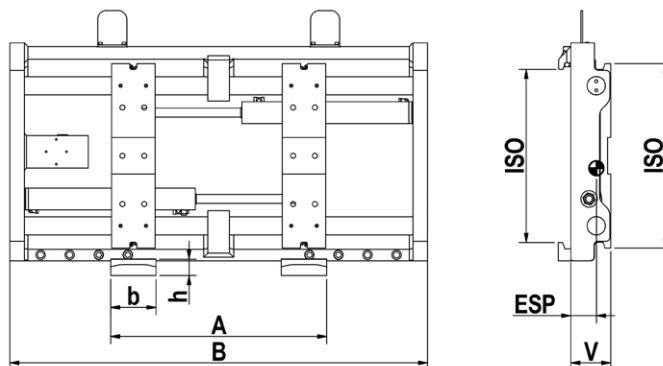


type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	B mm	opening range A OTO mm	b forks mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg	moving mass kg
ZVW 25	1,5 - 2,5/500	660 690 760 810 960	2500/500	980 1040 1150 1200 1350	320-880 320-940 320-1050 320-1100 320-1250	120	107	47 47 46 46 45	221 222 222 222 223	141 151 160 165 176	35
ZVW 28	2,5/600	690 760 810 960	2500/600	1040 1150 1200 1350	320-940 320-1050 320-1100 320-1250			47 46 46 45	221 222 222 223	151 160 165 176	

- 2 hydraulic functions required
- includes hoses and couplings
- includes sideshift via valve, depending on opening range
- also for hook-on forks ISO 2328
- bolt-on forks can be used
- forks not included
- please indicate fork width when ordering
- load backrest/protection strip type LS-RP see page 248
- if you don't want sideshift notify us on your order

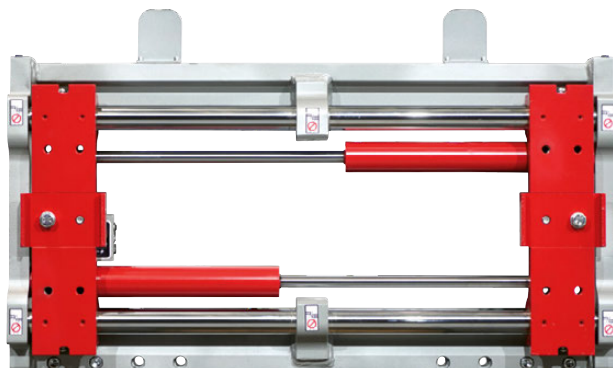

option: protection strip



fork lock