


# Fork positioner

**ZVW**  
**ISO IV**

integral sideshift, no forks

The high-performance fork positioner **ZVW** offers outstanding durability and excellent visibility. The double chrome axis guideways are particularly clean and enables precise fork positioning due to high-quality hydraulics. Standard forks with ISO mounting or bolt-on forks may be used. The integral sideshift operates depending on fork position. This means that only the fork carriers move inside the static frame.

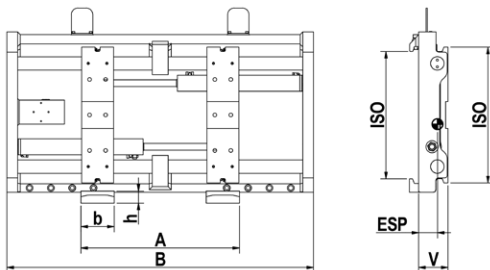


| type    | lift truck<br>to<br>LC mm | min.<br>carriage<br>mm | capacity<br>kg<br>LC mm | ISO | B<br>mm | A<br>mm<br>OTO | b<br>forks<br>mm | V<br>LLC<br>mm | COG/ESP<br>hor.<br>mm | COG/ESP<br>vert.<br>mm | weight<br>kg | moving<br>mass<br>kg |
|---------|---------------------------|------------------------|-------------------------|-----|---------|----------------|------------------|----------------|-----------------------|------------------------|--------------|----------------------|
| ZVW 50  | 5,0/600                   | 880                    | 5000/600                | IV  | 1250    | 370-1150       | 140              | 133            | 53                    | 327                    | 359          | 60                   |
|         |                           | 880                    |                         |     | 1350    | 370-1250       |                  |                | 52                    | 328                    | 376          |                      |
|         |                           | 930                    |                         |     | 1450    | 370-1350       |                  |                | 51                    | 330                    | 393          |                      |
|         |                           | 1030                   |                         |     | 1550    | 370-1450       |                  |                | 50                    | 330                    | 410          |                      |
| ZVW 55  | 5,5/600                   | 880                    | 5500/600                |     | 1250    | 370-1150       | 140              | 133            | 56                    | 327                    | 369          | 60                   |
|         |                           | 880                    |                         |     | 1350    | 370-1250       |                  |                | 56                    | 328                    | 386          |                      |
|         |                           | 930                    |                         |     | 1450    | 370-1350       |                  |                | 56                    | 330                    | 403          |                      |
|         |                           | 1030                   |                         |     | 1550    | 370-1450       |                  |                | 56                    | 330                    | 420          |                      |
| ZVW 60  | 6,0/600                   | 1015                   | 6000/600                |     | 1460    | 380-1340       | 150              | 143            | 58                    | 328                    | 462          | 75                   |
|         |                           | 1080                   |                         |     | 1660    | 380-1540       |                  |                | 57                    | 330                    | 489          |                      |
|         |                           | 1240                   |                         |     | 1860    | 380-1740       |                  |                | 56                    | 331                    | 516          |                      |
| ZVW 70  | 6,5-7,0/600               | 990                    | 7000/600                |     | 1460    | 380-1340       | 150              | 170            | 69                    | 327                    | 571          | 91                   |
|         |                           | 1080                   |                         |     | 1660    | 380-1540       |                  |                | 68                    | 328                    | 615          |                      |
|         |                           | 1240                   |                         |     | 1860    | 380-1740       |                  |                | 68                    | 329                    | 662          |                      |
|         |                           | 1440                   |                         |     | 2060    | 380-1940       |                  |                | 67                    | 331                    | 720          |                      |
| ZVW 80  | 8,0/600                   | 990                    | 8000/600                |     | 1460    | 480-1340       | 200              | 170            | 71                    | 325                    | 585          | 121                  |
|         |                           | 1180                   |                         |     | 1800    | 480-1680       |                  |                | 71                    | 327                    | 673          |                      |
|         |                           | 1295                   |                         |     | 1860    | 480-1740       |                  |                | 70                    | 327                    | 688          |                      |
|         |                           | 1340                   |                         |     | 2060    | 480-1940       |                  |                | 69                    | 327                    | 740          |                      |
|         |                           | 1440                   |                         |     | 2160    | 480-2040       |                  |                | 69                    | 328                    | 768          |                      |
|         |                           | 1540                   |                         |     | 2260    | 480-2140       |                  |                | 69                    | 328                    | 795          |                      |
|         |                           | 1750                   |                         |     | 2400    | 480-2280       |                  |                | 68                    | 330                    | 830          |                      |
| ZVW 100 | 8,0/900                   | 1200                   | 8000/900                |     | 1800    | 480-1680       | 200              | 195            | 78                    | 334                    | 910          | 130                  |
|         |                           | 1250                   |                         |     | 1860    | 480-1740       |                  |                | 78                    | 334                    | 930          |                      |
|         |                           | 1340                   |                         |     | 2060    | 480-1940       |                  |                | 78                    | 334                    | 936          |                      |
|         |                           | 1440                   |                         |     | 2160    | 480-2040       |                  |                | 78                    | 335                    | 996          |                      |
|         |                           | 1540                   |                         |     | 2260    | 480-2140       |                  |                | 77                    | 335                    | 1066         |                      |
|         |                           | 1680                   |                         |     | 2400    | 480-2280       |                  |                | 77                    | 335                    | 1120         |                      |
| ZVW 110 | 8,0/1100                  | 1550                   | 8000/1100               |     | 2060    | 480-1940       | 200              | 210            | 86                    | 332                    | 1071         | 142                  |
|         |                           | 1700                   |                         |     | 2260    | 480-2140       |                  |                | 85                    | 334                    | 1150         |                      |
|         |                           | 1750                   |                         |     | 2400    | 480-2280       |                  |                | 84                    | 336                    | 1200         |                      |

- 2 hydraulic functions required
- includes hoses and couplings

- includes sideshift via valve, depending on opening range
- also for hook-on forks ISO 2328

- bolt-on forks can be used
- forks not included
- please indicate fork width when ordering
- load backrest/protection strip type LS-RP see page 248
- if you don't want sideshift notify us on your order



option: protection strip

**DURWEN**   
Forklift Attachments

PL 01-2026