
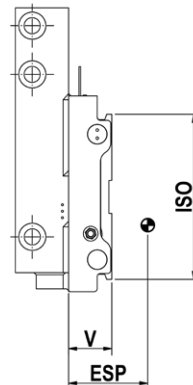


Fork positioner

ZVW-I
ISO II

integrated version, integral sideshift

The **integral fork positioner ZVW-I** offers outstanding durability and excellent visibility. The double chrome axis guideways are particularly clean and enables precise fork positioning due to high-quality hydraulics. Standard forks with ISO mounting or bolt-on forks may be used. The integral sideshift operates depending on fork position. This means that only the fork carriers move inside the static frame.

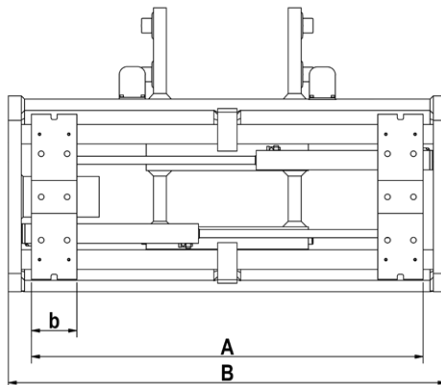


type	lift truck to LC mm	capacity kg LC mm	ISO	B mm	A mm OTO	b forks mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg	moving mass kg
ZVW 25-I	1,5 - 2,5/500	2500/500	II	980	320-880	120	114	50	206	155	35
				1040	320-940				204	160	
				1150	320-1050				204	170	
				1350	320-1250				200	190	
ZVW 28-I	2,5/600	2500/600		1040	320-940	120	114	50	204	160	35
				1150	320-1050				204	170	
				1350	320-1250				200	190	

- 2 hydraulic functions required
- ready to connect, access metric
- includes sideshift via valve, depending on opening range
- for hook-on forks ISO 2328
- bolt-on forks can be used
- forks not included

- please indicate fork width when ordering
- including brackets, chain anchor and stub shafts, without rollers
- detailed information including carriage drawings are required with the order as well as forklift model and mast model details
- weight, COG and LLC do not include brackets

- LLC does not include forks
- load backrest/protection strip type LS-RP see page 248
- clamping of goods is not allowed

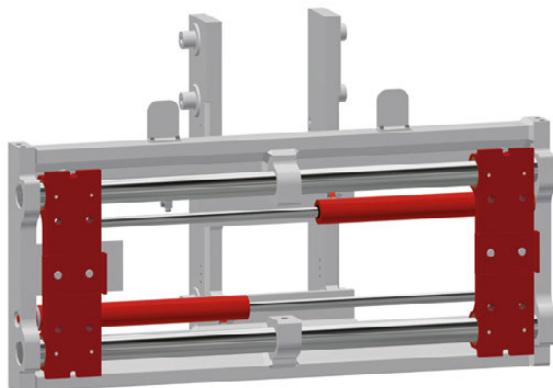

option: protection strip



fork lock