


Fork positioner

ZVW-I
ISO IV

integrated version, integral sideshift

The integral fork positioner ZVW-I offers outstanding durability and excellent visibility. The double chrome axis guideways are particularly clean and enables precise fork positioning due to high-quality hydraulics. Standard forks with ISO mounting or bolt-on forks may be used. The integral sideshift operates depending on fork position. This means that only the fork carriers move inside the static frame.

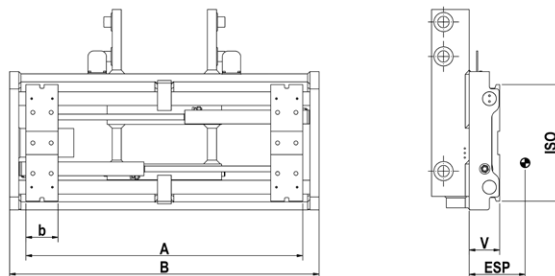

type	lift truck to LC mm	capacity kg LC mm	ISO	B mm	A mm OTO	b forks mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg	moving mass kg
ZVW 50-I	5,0/600	5000/600	IV	1250 1350 1450 1550	370-1150 370-1250 370-1350 370-1450	140	133	48	327 328 329 330	350 365 380 400	60
ZVW 55-I	5,5/600	5500/600		1250 1350 1450 1550	370-1150 370-1250 370-1350 370-1450	140	133	50	327 328 329 330	360 375 390 410	60
ZVW 60-I	6,0/600	6000/600		1460 1660 1860	380-1340 380-1540 380-1740	150	150	60	328 330 331	450 490 530	75
ZVW 70-I	6,5-7,0/600	7000/600		1460 1860 2060	380-1340 380-1740 380-1940	150	177	75	327 329 331	560 660 705	91
ZVW 80-I	8,0/600	8000/600		1800 1860 2060 2160 2260 2400	480-1680 480-1740 480-1940 480-2040 480-2140 480-2280	200	177	76	327 327 327 327 328 330	670 685 735 760 785 820	121
				1800 1860 2060 2160 2260 2400	480-1680 480-1740 480-1940 480-2040 480-2140 480-2280				322 223 334 334 334 335	865 885 955 990 1020 1070	
				1800 1860 2060 2160 2260 2400	480-1680 480-1740 480-1940 480-2040 480-2140 480-2280				322 223 334 334 334 335	865 885 955 990 1020 1070	
				1800 1860 2060 2160 2260 2400	480-1680 480-1740 480-1940 480-2040 480-2140 480-2280				322 223 334 334 334 335	865 885 955 990 1020 1070	
				1800 1860 2060 2160 2260 2400	480-1680 480-1740 480-1940 480-2040 480-2140 480-2280				322 223 334 334 334 335	865 885 955 990 1020 1070	
ZVW 100-I	8,0/900	8000/900		1800 1860 2060 2160 2260 2400	480-1680 480-1740 480-1940 480-2040 480-2140 480-2280	200	195	80	322 223 334 334 334 335	865 885 955 990 1020 1070	130
				1800 1860 2060 2160 2260 2400	480-1680 480-1740 480-1940 480-2040 480-2140 480-2280				322 223 334 334 334 335	865 885 955 990 1020 1070	
				1800 1860 2060 2160 2260 2400	480-1680 480-1740 480-1940 480-2040 480-2140 480-2280				322 223 334 334 334 335	865 885 955 990 1020 1070	
ZVW 110-I	8,0/1100	8000/1100		2060 2260 2400	480-1940 480-2140 480-2280	200	210	85	332 334 336	1045 1115 1170	142

- 2 hydraulic functions required
- ready to connect, access metric
- includes sideshift via valve, depending on opening range

- for hook-on forks ISO 2328
- bolt-on forks can be used
- forks not included
- please indicate fork width when ordering
- including brackets, chain anchor and stub shafts, without rollers

- detailed information including carriage drawings are required with the order as well as forklift model and mast model details
- weight, COG and LLC do not include brackets
- LLC does not include forks
- load backrest/protection strip type LS-RP see page 248
- clamping of goods is not allowed

