


Fork positioner

ZVW-S
ISO II

constant sideshift, no forks

The **high-performance fork positioner ZVW-S** offers outstanding durability and excellent visibility. The double chrome axis guideways are particularly clean and enables precise fork positioning due to high-quality hydraulics. Standard forks with ISO mounting or bolt-on forks may be used. The constant sideshift operates at every fork position. This means that a separate cylinder moves the complete frame.

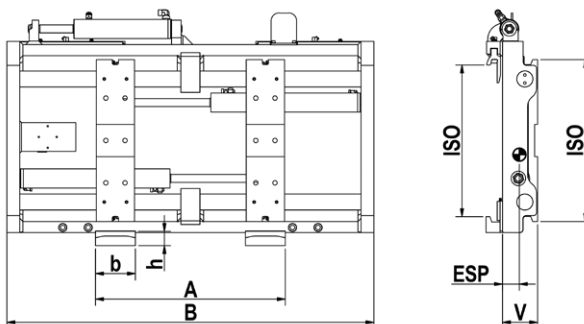


type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	B mm	A mm OTO	b forks mm	sideshift mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg
ZVW 20-S	1,0-2,0/500	810 820 930	2000/500	980 1040 1150	320-880 320-940 320-1050	120	+/- 100	124	53	240	181
ZVW 25-S	2,0/600-2,5/500	810 820 930 980 1130	2500/500	980 1040 1150 1200 1350	320-880 320-940 320-1050 320-1100 320-1250				53	240	191
									52	241	203
									53	241	185
									52	242	192
									52	242	204
									52	241	210
									51	241	225
ZVW 28-S	2,5/600	820 930 980 1130	2500/600	1040 1150 1200 1350	320-940 320-1050 320-1100 320-1250				52	242	192
									52	242	204
									52	241	210
									51	240	225

- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard

- also for hook-on forks ISO 2328
- bolt-on forks can be used
- forks not included

- please indicate fork width when ordering
- load backrest/protection strip type LS-RP see page 248

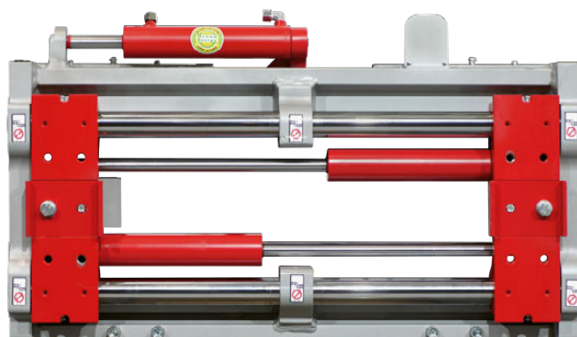

option: protection strip



fork lock