


Fork positioner

ZVW-S
ISO III

constant sideshift, no forks

The high-performance fork positioner **ZVW-S** offers outstanding durability and excellent visibility. The double chrome axis guideways are particularly clean and enables precise fork positioning due to high-quality hydraulics. Standard forks with ISO mounting or bolt-on forks may be used. The constant sideshift operates at every fork position. This means that a separate cylinder moves the complete frame.

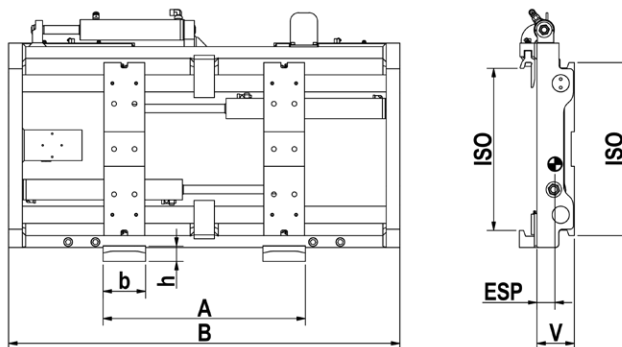


type	lift truck to LC mm	min. carriage mm	capacity kg LC mm	ISO	B mm	A mm OTO	b forks mm	sideshift mm	V LLC mm	COG/ESP hor. mm	COG/ESP vert. mm	weight kg
ZVW 30-S	3,0/500	820 930 980 1080 1130	3000/500	III	1040 1150 1200 1300 1350	320-940 320-1050 320-1100 320-1200 320-1250	120	+/- 100	127	54 54 54 54 54	296 296 296 295 295	208 219 228 238 244
ZVW 35-S	3,0/600- 3,5/500	930 980 1080 1130	3500/500		1150 1200 1300 1350	320-1050 320-1100 320-1200 320-1250	120		127	55 55 54 54	296 296 295 295	222 228 239 244
ZVW 45-S	3,5-5,0/600	1020 1080 1130 1180 1280 1480	5000/600		1150 1250 1350 1450 1550 1750	370-1050 370-1150 370-1250 370-1350 370-1450 370-1650	140		150	66 66 65 65 64 64	292 291 292 292 291 290	303 320 336 353 370 402

- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard

- also for hook-on forks ISO 2328
- bolt-on forks can be used
- forks not included

- please indicate fork width when ordering
- load backrest/protection strip type LS-RP see page 248

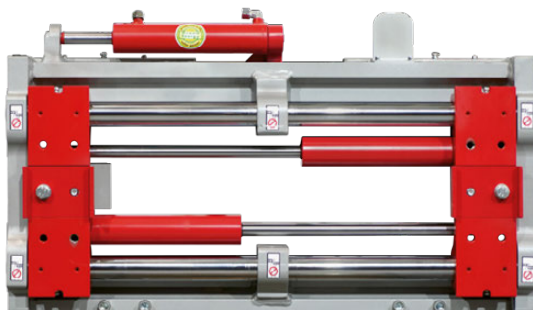

option: protection strip



fork lock

DURWEN 
Forklift Attachments

PL 01-2026