


Fork positioner

ZVW-S
ISO IV

constant sideshift, no forks

The high-performance fork positioner **ZVW-S** offers outstanding durability and excellent visibility. The double chrome axis guideways are particularly clean and enables precise fork positioning due to high-quality hydraulics. Standard forks with ISO mounting or bolt-on forks may be used. The constant sideshift operates at every fork position. This means that a separate cylinder moves the complete frame.

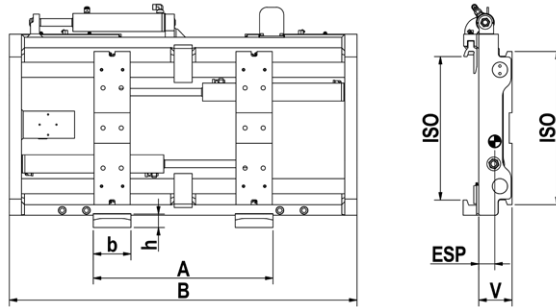

| type | lift truck to LC mm | min. carriage mm | capacity kg LC mm | ISO | B mm | A mm OTO | b forks mm | sideshift mm | V LLC mm | COG/ESP hor. mm | COG/ESP vert. mm | weight kg |
|-----------|---------------------|------------------|-------------------|----------|----------|----------|------------|---|----------|-----------------|------------------|-----------|
| ZVW 50-S | 5,0/600 | 1050 | 5000/600 | IV | 1250 | 370-1150 | 140 | +/- 100 | 156 | 61 | 388 | 419 |
| | | 1100 | | | 370-1250 | 61 | | | | | 437 | |
| | | 1150 | | | 370-1350 | 61 | | | | | 455 | |
| | | 1230 | | | 370-1450 | 61 | | | | | 473 | |
| ZVW 55-S | 5,5/600 | 1050 | 5500/600 | | 1250 | 370-1150 | 140 | +/- 100 | 156 | 63 | 388 | 429 |
| | | 1100 | | | 370-1250 | 63 | | | | | 447 | |
| | | 1150 | | | 370-1350 | 63 | | | | | 465 | |
| | | 1230 | | | 370-1450 | 63 | | | | | 483 | |
| ZVW 60-S | 6,0/600 | 1150 | 6000/600 | | 1460 | 380-1340 | 150 | +/- 100 +/- 160 +/- 160 | 166 | 65 | 382 | 560 |
| | | 1420 | | | 380-1540 | 65 | | | | | 595 | |
| | | 1580 | | | 380-1740 | 65 | | | | | 630 | |
| ZVW 70-S | 6,5-7,0/600 | 1210 | 7000/600 | | 1460 | 380-1340 | 150 | +/- 100 +/- 160 +/- 160 +/- 160 | 193 | 79 | 374 | 682 |
| | | 1420 | | | 380-1540 | 79 | | | | | 730 | |
| | | 1580 | | | 380-1740 | 79 | | | | | 776 | |
| | | 1680 | | | 380-1940 | 79 | | | | | 822 | |
| ZVW 80-S | 8,0/600 | 1210 | 8000/600 | | 1460 | 480-1340 | 200 | +/- 100 +/- 160 +/- 160 +/- 160 +/- 160 +/- 160 +/- 160 | 193 | 83 | 373 | 685 |
| | | 1520 | | 480-1680 | 82 | 785 | | | | | | |
| | | 1580 | | 480-1740 | 82 | 802 | | | | | | |
| | | 1680 | | 480-1940 | 81 | 866 | | | | | | |
| | | 1680 | | 480-2040 | 81 | 890 | | | | | | |
| | | 1780 | | 480-2140 | 81 | 915 | | | | | | |
| | | 1980 | | 480-2280 | 81 | 950 | | | | | | |
| ZVW 100-S | 8,0/900 | 1580 | 8000/900 | 1800 | 480-1680 | 200 | +/- 160 | 210 | 95 | 269 | 1010 | |
| | | 1580 | | 480-1740 | 95 | | | | | 1030 | | |
| | | 1680 | | 480-1940 | 95 | | | | | 1090 | | |
| | | 1680 | | 480-2040 | 95 | | | | | 1120 | | |
| | | 1780 | | 480-2140 | 95 | | | | | 1150 | | |
| | | 1980 | | 480-2280 | 93 | | | | | 1198 | | |
| ZVW 110-S | 8,0/1100 | 1680 | 8000/1100 | 2060 | 480-1940 | 200 | +/- 160 | 233 | 100 | 364 | 1165 | |
| | | 1780 | | 480-2140 | 101 | | | | | 1230 | | |
| | | 1980 | | 480-2280 | 101 | | | | | 1280 | | |

- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard

- also for hook-on forks ISO 2328
- bolt-on forks can be used
- forks not included

- please indicate fork width when ordering
- load backrest/protection strip type LS-RP see page 248