


Fork positioner

ZVW-S-TGZ
ISO II

with hook-on telescopic forks, with constant sideshift

The fork positioner type ZVW-S-TGZ with shaft guidance features durability and excellent visibility. The shaft guidance is especially clean and allows for precise fork positioning due to high-quality hydraulics. Constant sideshift enables usage of the complete sideshift at every fork position. The unit is equipped with telescopic forks which facilitate loading and unloading of transport vehicles. The TGZ can be extended under load and feature 100% synchronised reach movement. Fork pockets feature +2mm wear resistant mangan steel wear zone as standard.

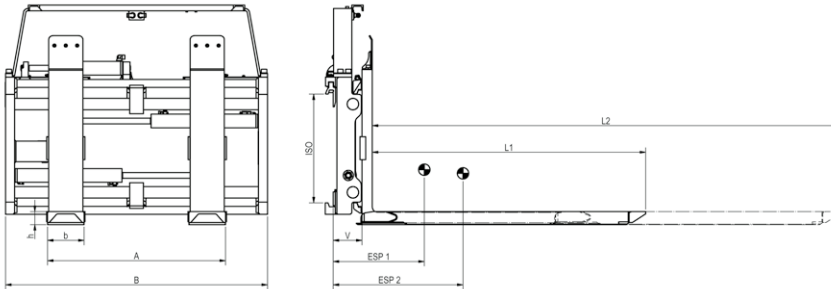

type	lift truck to LC mm	min. carriage mm	capacity kg LC 1mm	capacity kg LC 2mm	ISO	B mm	opening range A OT0 mm	retracted extended L1/L2 mm	fork bxh mm	fork back mm	sideshift mm	V LLC mm	COG/ESP hor. 1/2 mm	COG/ ESP vert. mm	weight kg
ZVW-S-TGZ.20.1200*	1,0- 2,0/500	820	2000/500	950/1450	II	1040	330-950	1200/2050 1350/2350	131x57	120x45	+/- 100	124	285/375 325/440	176 168	374 388
ZVW-S-TGZ.20.1350*	1,0- 2,0/500	820	2000/500	950/1450		1040 1150	360-980 360-1090	1200/2050	161x57	150x45			305/420 295/400	166 170	410 430
ZVW-S-TGZ.22.1200	1,0- 2,0/500	820 930	2000/500	950/1450		1040 1150	360-980 360-1090	1350/2350	161x57	150x45			350/490 340/470	157 161	426 446
ZVW-S-TGZ.22.1350	1,0- 2,0/500	820 930	2000/500	810/1750		1040 1150	360-980 360-1090	1200/2050	161x 7	150x45			305/415 290/395	159 170	410 428
ZVW-S-TGZ.25.1200	2,0- 2,5/600	820 930	2500/600	1200/1450		1040 1150	360-980 360-1090	1350/2350	161x57	150x45			350/490 340/475	149 162	428 440
ZVW-S-TGZ.25.1350	2,0- 2,5/600	820 930	2500/600	1000/1750		1040 1150	360-980 360-1090	1350/2350	161x57	150x45					

- 3 hydraulic functions required
- includes hoses and couplings
- hook-on forks ISO 2328 as standard
- protection strip with integrated hose guide as standard
- standard with easily replaceable wear zones and fork tip made of solid steel to reduce service costs

- thicker mangan steel wear zone (+6 mm) ISO II upon request
- bolt-on forks ISO II upon request
- pallet stop ISO II (see page 202):
 - A) 75 mm on the fork pocket sides ISO II upon request
 - B) 400 mm
 - C) 850 mm
- Type B and C reduce the useable length by at least 50 mm.
- Please indicate required position upon order.
- solenoid valve upon request (12 V, 24 V, 48 V, 80 V - please specify) standard is ISO A
- ISO type B mounting ISO II upon request

* 1-cylinder model

