
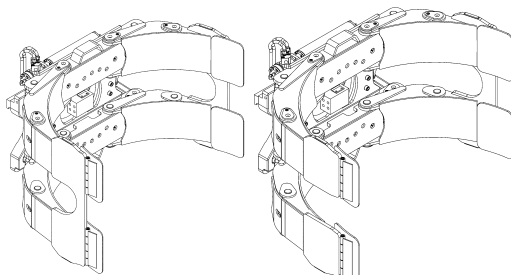


Paper roll clamp 360°

PRK 40
ISO III/IV

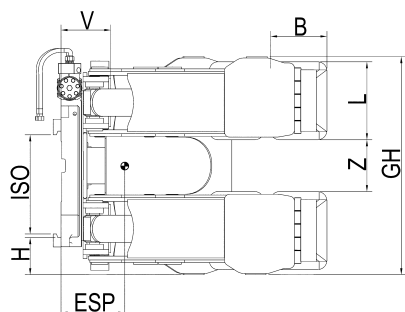

long arm unsplit

long arm split

type	capacity kg LC mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	ESP COG mm	weight kg
long arm unsplit											
PRK 40 B - 13	3000/650	III/IV	250 - 1300	powered	1040	250x400	200	195/200	215	210	825
PRK 40 S - 13	3000/650		500 - 1300	fixed						210	820
PRK 40 B - 14	2800/725		250 - 1450	powered						225	860
PRK 40 S - 14	2800/725		500 - 1450	fixed						225	855
PRK 40 B - 15	2650/760		250 - 1520	powered						235	905
PRK 40 S - 15	2650/760		500 - 1520	fixed						235	900
PRK 40 B - 16	2500/800		250 - 1600	powered						275	930
PRK 40 S - 16	2500/800		600 - 1600	fixed						275	925
PRK 40 B - 18	2100/915		350 - 1830	powered						295	970
PRK 40 S - 18	2100/915		630 - 1830	fixed						295	965
long arm split											
PRK 40 TB - 13	3000/650	III/IV	250 - 1300	powered	1040	250x400	200	195/200	215	205	815
PRK 40 TS - 13	3000/650		500 - 1300	fixed						205	810
PRK 40 TB - 14	2800/725		250 - 1450	powered						220	850
PRK 40 TS - 14	2800/725		500 - 1450	fixed						220	845
PRK 40 TB - 15	2650/760		250 - 1520	powered						230	895
PRK 40 TS - 15	2650/760		500 - 1520	fixed						230	890
PRK 40 TB - 16	2500/800		250 - 1600	powered						270	920
PRK 40 TS - 16	2500/800		600 - 1600	fixed						270	915
PRK 40 TB - 18	2100/915		350 - 1830	powered						290	960
PRK 40 TS - 18	2100/915		630 - 1830	fixed						290	955

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces see page 68
- other surfaces upon request
- centre cover upon request

- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard, positioning at 45°, chose on order (no add-on price)
- 0° arm design upon request

- one piece contact plate per arm upon request
- load extender upon request
- quick release hooks (ISO III), (ISO IV) upon request
- force options see page 241

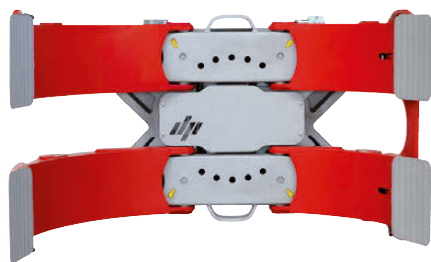


image shows unit complete with
optional centre cover

DURWEN
Forklift Attachments

More than 75 years experience