
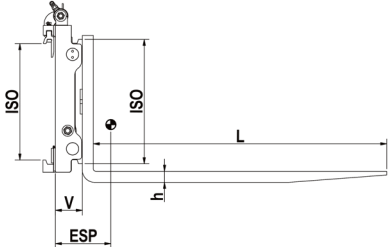


Fork positioner

constant sideshift, bolt-on forks

The **high-performance fork positioner ZVW-GS** offers outstanding durability and excellent visibility. The double chrome axis guideways is particularly clean and enables precise fork positioning due to high-quality hydraulics. The bolt-on forks are firmly attached to the carriers and provide smooth running and precision even in quick operation. The constant sideshift operates at every fork position. This means that a separate cylinder moves the complete frame.




type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm OTO	forks b x h x L mm	sideshift mm	V LLC mm	ESP COG mm	weight kg		
ZVW 30-GS*	3000/500	3,0/500	III	1040	325-945	125x45x1200	+/- 100	127	248	352		
				1150	325-1055				241	363		
				1200	325-1105				238	370		
				1300	326-1205				234	380		
				1350	325-1255				228	388		
ZVW 35-GS	3500/500	3,0/600-3,5/500		1150	340-1070	140x50x1200		127	265	398		
				1200	340-1120				262	405		
				1300	340-1220				255	418		
				1350	340-1270				252	424		
ZVW 40-GS	4000/500	3,5/600-4,0/500		1150	370-1050	140x50x1200			+/- 100	150	249	471
				1200	370-1100			248			479	
				1250	370-1150			248			487	
				1350	370-1250			247			504	
				1450	370-1350			245			520	
				1550	370-1450			243			537	
				1750*	370-1650			239			575	
				2000**	370-1900			234			623	
ZVW 45-GS	5000/600	4,0/600-5,0/600		1150	380-1060	150x60x1200		+/- 100		150	274	532
				1250	380-1160						268	550
				1350	380-1260						261	566
				1450	380-1360						255	583
				1550	380-1460						249	600
				1750*	380-1660						240	632
				2000**	380-1910						228	674

- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard

- features bolt-on for forks as standard
- also for hook-on for forks ISO 2328
- load backrest/protection strip see page 240
- clamping of goods is not allowed

* minimum truck carriage width: 1450 mm
** minimum truck carriage width: 1750 mm

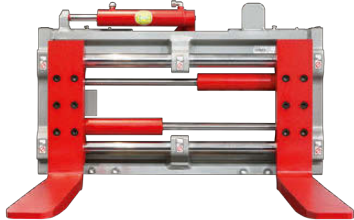

option: protection strip

*Forks longer 1600 mm cross section changes	
type	forks b x h mm
ZVW 30-GS	125x50