


Revolving fork clamp 360°

bolt-on forks, constant sideshift

The **rotating fork clamp DUZ-S** is a universal attachment and can be rotated endlessly 360 degrees. The load can be picked up on or between the forks (clamped). In addition, the rotating fork clamp is used for emptying wire mesh boxes, crates and other containers. The attachment has a constant sideshift.

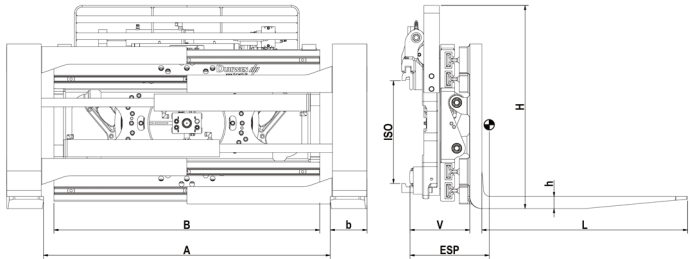


type	capacity on forks kg LC mm	capacity as clamp kg LC mm	lift truck to LC mm	ISO	B mm	opening range A mm	forks b x h x L mm	sideshift mm	V mm	ESP mm	weight kg
DUZ 50-S	4800/600	3500/600	5,0/600	IV	1250 1350 1450	250-1600 250-1700 250-1800	150x70x1200	+/- 100	327	360 355 350	1350 1375 1415
DUZ 60-S	5700/600	3800/600	6,0/600		1300 1450 1550	250-1650 250-1800 250-1900	150x70x1200			355 350 345	1510 1540 1560
DUZ 80-S	8000/600	4800/600	7,0-8,0/600		1550	160-1700	200x70x1200			320	1995
DUZ 100-S	8000/900	7500/600	8,0/900		1550	160-1700	200x80x1200			315	2160


- 3 hydraulic functions required
- includes hoses and couplings
- 360° endless rotation
- direct drive due to worm gear
- constant sideshift as standard
- features bolt-on forks as standard

- toe-in on forks as standard
- with pressure relief valve on the clamp function as standard
- standard with protection strip type SB-DG (does not rotate, height = H, for exact type see page 238)
- cylinder protection upon request (ISO IV)
- solenoid valve upon request (12 V, 24 V, 48 V, 80 V - please specify)

- pressure gauge + pressure manually adjustable (up to 160 bar) upon request
- slip-on arms see page 237
- foundry/fishing version see page 234-235

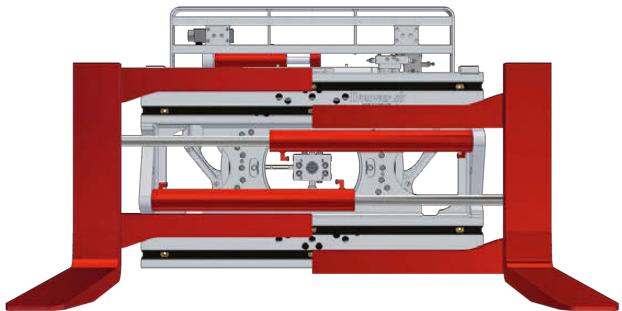

bolt-on forks



option: cylinder protection