


Fork clamp

PGK
ISO II/III

constant sideshift, bolt-on forks

The **fork clamp PGK** can spread the forks beyond the attachment frame width. It can carry loads on the forks as well as clamped between the forks. The strong steel profiles allow for excellent visibility and minimised lost load centre. An integral sideshift is included as well as bolt-on forks.

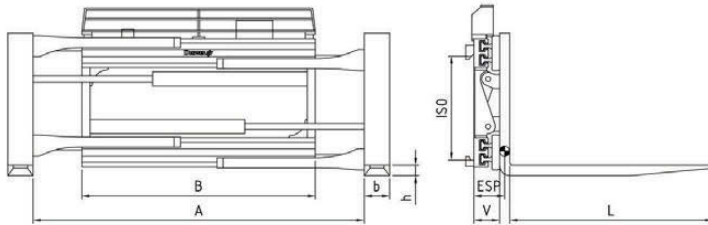

type	capacity on forks kg LC mm	capacity as clamp kg LC mm	lift truck to LC mm	ISO	B mm	opening range A ITI mm	forks b x h x L mm	V LLC mm	ESP COG mm	weight kg
PGK 15	1500/500	1200/500	1,0-1,5/500	II	980 1050	360-1510 360-1580	100x40x1200	126	218 212	335 345
PGK 20	2000/500	1500/500	1,6-2,0/500	II	980 1050 1150	360-1510 360-1580 360-1680	100x45x1200	126	225 220 205	350 360 370
PGK 25	2500/600	1900/500	2,0-2,5/600	II	980 1050 1080 1150 1150 1200 1400	310-1460 310-1530 310-1560 310-1630 70-1150 310-1680 310-1880	125x45x1200	131	232 228 227 225 222 220 205	405 415 420 430 425 435 465
PGK 30	3000/500	2400/500	3,0/500	III	980 1050 1150 1150 1200 1300 1350 1450	310-1460 310-1530 310-1630 210-1430 310-1680 310-1780 310-1830 310-1930	125x50x1200	131	230 225 220 222 218 216 215 210	425 435 450 445 460 470 480 495
PGK 35	3500/500	2700/500	3,0/600- 3,5/500	III	1150 1250 1350	260-1580 260-1680 260-1780	150x50x1200	136	250 247 245	510 530 550
PGK 40	4100/500	2900/500	3,5/600- 4,0/500	III	1150 1250 1350 1450	250-1560 250-1660 250-1760 250-1860	150x50x1200	138	220 218 215 210	600 620 635 650
PGK 45	4500/600	3500/500	4,0/600- 5,0/500	III	1250 1350 1450 1550	250-1660 250-1760 250-1860 250-1960	150x60x1200	148	215 210 209 208	670 690 710 730
PGK 48	5000/600	3500/600	5,0/600	III	1350 1450 1550	250-1700 250-1800 250-1900	150x70x1200	158	225 223 220	780 795 810

- 2 hydraulic functions required
- includes hoses and couplings
- features bolt-on forks as standard
- toe- in on forks as standard
- with pressure relief valve on the clamp function as standard
- with protection strip as standard
- load backrest type LS-K see page 239
- cylinder protection (ISO II/III) upon request
- slip-on arms see page 237
- foundry/fishing version see page 234-235

DURWEN
Forklift Attachments

More than 75 years experience